

Enquiry  Ordering

Customer number: \_\_\_\_\_

Company stamp/signature: \_\_\_\_\_

Contact person: \_\_\_\_\_

Telephone: \_\_\_\_\_

Offer number: \_\_\_\_\_


Commission: \_\_\_\_\_

Postcode mounting location: \_\_\_\_\_


Standard snow load:  65 kg/m<sup>2</sup>  85 kg/m<sup>2</sup>  125 kg/m<sup>2</sup>  160 kg/m<sup>2</sup>  230 kg/m<sup>2</sup>  290 kg/m<sup>2</sup>  
 350 kg/m<sup>2</sup>

Dimensions: Width outer edge support: \_\_\_\_\_ Depth outer edge support: \_\_\_\_\_

Height upper edge wall connection: \_\_\_\_\_ Height lower edge eave: \_\_\_\_\_

Number of roof sections: \_\_\_\_\_  
(Maximum width of 1,000 mm/roof section!)

Roof ventilation (price per roof field)


Colour:  RAL \_\_\_\_\_ Special colour: \_\_\_\_\_ Pre-anodizationSupport feet:   Amount \_\_\_\_\_

Amount \_\_\_\_\_


Number of supports: \_\_\_\_\_

Support extension \_\_\_\_\_ mm

(for adaptation of the support length on the construction site)

Verge rafters: 

(standard)

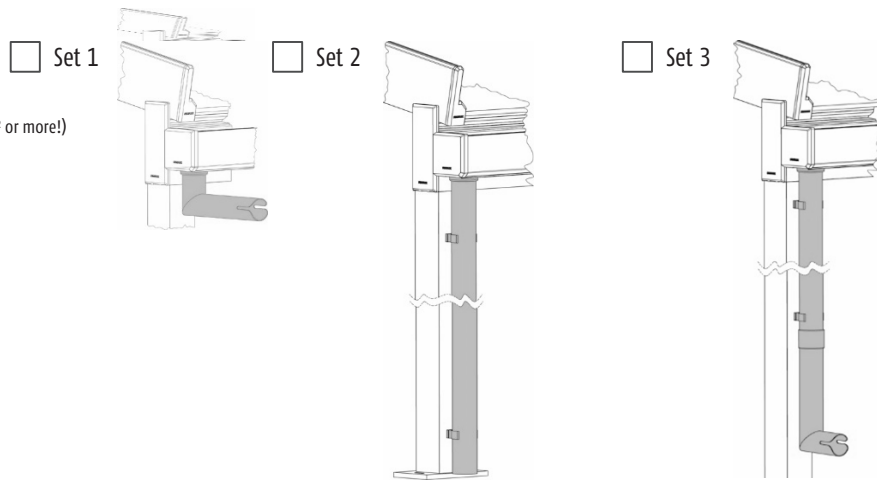


(required for shades below)

Glazing designed for:  8 mm  10 mm  12 mmFillings/multi-skin sheets for:  16 mm  24 mmGlazing bars for division of the glass:  yes  noCollecting channel design:  square  roundWith leaves stop grid :  yes  no

## Drainage:

(A second downpipe is recommended for a roof surface area of 20 m<sup>2</sup> or more!)



- Set 1 (Screw supports incl. seal, 180° spout, aluminium in roof colour)
- Set 2 (Screw supports incl. seal, downpipe 2,500 mm, 2 clamp mounts, aluminium in roof colour)
- Set 3 (Screw necks incl. seal, downpipe 2,500 mm, 87° pipe bend with outlet, 1 socket, 2 clamp mounts, aluminium in roof colour)

Aluminium covering panel in the roof colour for set 2 or 3

Position of drainage:  left  right  middle (only possible if there are 3 or more support)  
(External view)

## Lighting:

- \_\_\_\_\_ Part Light strips for LEDs (customised over the whole of the rafter length in the inner area)
- \_\_\_\_\_ Part Light strips for LED-stripe (customised over the whole of the rafter length in the inner area)
- \_\_\_\_\_ Part LED spots per light strip (please create a sketch for the distribution of the spots)
- \_\_\_\_\_ Part Set of 3 LED recessed light "Altea" 3000K
- \_\_\_\_\_ Part LED strip 5.000 mm roll (120 LED's / m)
- \_\_\_\_\_ Part Dimming controller
- \_\_\_\_\_ Part 1-channel remote control
- \_\_\_\_\_ Part 5-channel remote control with dimming control
- \_\_\_\_\_ Part Transformer DC 24V 30W
- \_\_\_\_\_ Part Transformer 24V 100W
- \_\_\_\_\_ Part Set of 4 Set, 2m extension cable
- \_\_\_\_\_ Part Set of 4 Set, 3m extension cable
- \_\_\_\_\_ Part Set of 3 Set, 1.5m Y-connection cable

Cable duct wall connection:  yes  no

Accessory: \_\_\_\_\_ part Adapter for external shading  
 \_\_\_\_\_ part Adapter for internal shading

## Foundation elements:

- |        |  |  |  |                               |                               |
|--------|--|--|--|-------------------------------|-------------------------------|
| front: | <input type="checkbox"/> SF20<br><input type="checkbox"/> SF42 | <input type="checkbox"/> SF25<br><input type="checkbox"/> SF45 | <input type="checkbox"/> Framed SF25   | <input type="checkbox"/> SF30 | <input type="checkbox"/> SF35 |
| left:  | <input type="checkbox"/> SF20<br><input type="checkbox"/> SF42 | <input type="checkbox"/> SF25<br><input type="checkbox"/> SF45 | <input type="checkbox"/> Framed SF25<br><input type="checkbox"/> Triangle glazing (roof light) | <input type="checkbox"/> SF30 | <input type="checkbox"/> SF35 |
| right: | <input type="checkbox"/> SF20<br><input type="checkbox"/> SF42 | <input type="checkbox"/> SF25<br><input type="checkbox"/> SF45 | <input type="checkbox"/> Framed SF25<br><input type="checkbox"/> Triangle glazing (roof light) | <input type="checkbox"/> SF30 | <input type="checkbox"/> SF35 |

Please complete and send the corresponding order form!

